

# PNEUMATIC MANIFOLDS (500 PSI)

## M—Single Manifold

(12 tube maximum)




3 tube shown




10 tube shown

## 2M—Double Manifold

(24 tube maximum)



4 tube shown

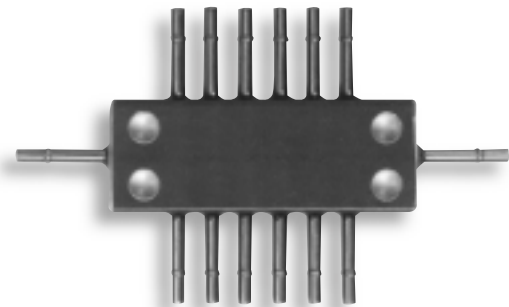

12 tube shown

The pneumatic manifolds are available in two designs, single manifold and double manifold. Tubulation sizes are .040 inch, .063 inch and .125 inch O.D. Lengths of the manifolds are customer specified up to maximum of 12 tubes (single) and 24 tubes (double) manifold.

**Materials:** Connector body is anodized aluminum. Tubulations are stainless steel.

**Available Colors:** CLR (clear), BLK (black), GLD (gold), RED, BLU (blue) and GRN (green). If a color is not specified, Scanivalve will supply a color based on availability.

### To order, specify ScanCo #:

#### Single Manifolds

TC 040 - M 3 (Color)

TC 063 - M 3 (Color)

TC 125 - M 3 (Color)

#### Double Manifolds

TC 040 - 2M 4 (Color)

TC 063 - 2M 4 (Color)

TC 125 - 2M 4 (Color)

Tube  
Connector

Tubulation  
Size

Manifold  
M=Single

Tubulation  
Quantity

(End tubes excluded)  
(minimum of 3—maximum of 12)

Specify  
Color

Tube  
Connector

Tubulation  
Size

Manifold  
2M=Double

Tubulation  
Quantity

(End tubes excluded)  
(minimum of 4—maximum of 24)

Specify  
Color